

# JD6

AC Contactor



**00040 00042 00044 00050 00056 00058  
00060**



### Specifications:

IEC947-4-1, VDE0660

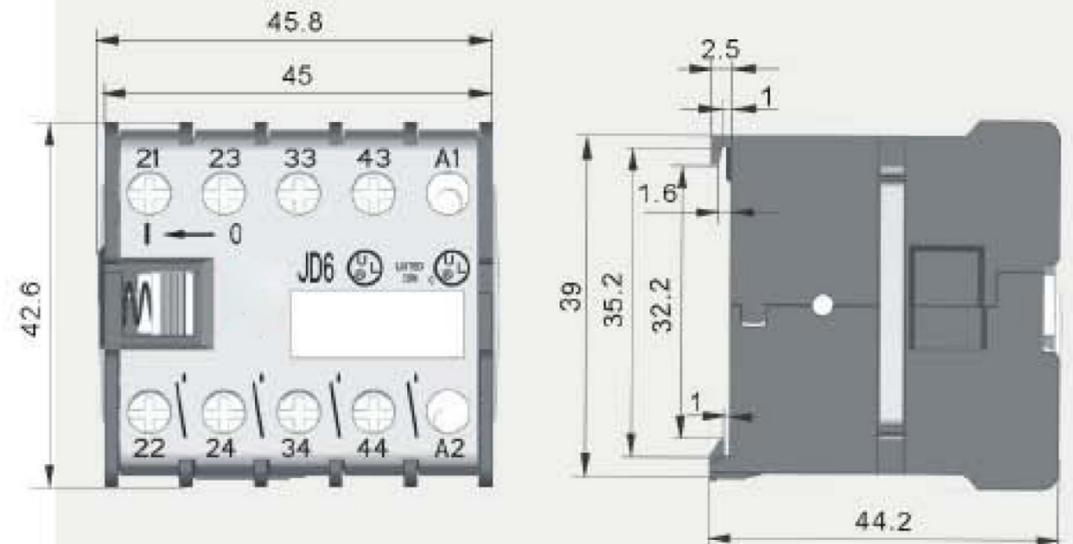
Rated Operational Current: AC-3: 9A  
AC-1: 25A

UL508, E215185

Ue	240	400	V~
Ie	9.6	6.1	A

Rated Operational Voltage:  $U_e \leq 440V \sim$   
Rated Insulation Voltage:  $U_i \geq 1000V \sim$   
Frequency Limits: 25...60Hz  
Electrical Life:  $5 \times 10^5$  Cycles  
Ambient Air Temperature:  $-20^\circ C \dots +50^\circ C$   
Short Circuit: Rating 5000A at 240v  
DC rating: 24VDC

**JD6**



# JD6





AC Contactor



Available Switch Options :

**Type:** JD6

**Art.No. :** 12061+

Voltage/Frequency	Function	Terminal Type	Accessories
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
<b>01</b> 110V~/50Hz	<b>01</b> 3NO 	<b>1</b> Screw Type	<b>01</b> None
<b>02</b> 110V~/60Hz	<b>02</b> 4NO 		
<b>03</b> 230V~/50Hz	<b>03</b> 2NO+1NC 		
<b>04</b> 230V~/60Hz	<b>04</b> 2NO+2NC 		
<b>05</b> 400V~/50Hz	<b>05</b> 3NO+1NC 		
<b>06</b> 400V~/60Hz			
<b>07</b> 24VDC			
<b>08</b> 240V~/50Hz			
<b>09</b> 240V~/60Hz			
<b>XX</b> 24V~/60Hz			