





PERFORMANCES

| MODELS | m ³ /h | l/s | Pa | W | dB (A)* |
|-------------|-------------------|-----|----|----|---------|
| E-STYLE 90 | 80 | 22 | 23 | 10 | 30,1 |
| E-STYLE 100 | 95 | 26 | 42 | 14 | 31,4 |
| E-STYLE 120 | 165 | 46 | 55 | 15 | 36,7 |
| E-STYLE 150 | 295 | 82 | 71 | 25 | 43,9 |

* Sound pressure at 3 mt

CURVES

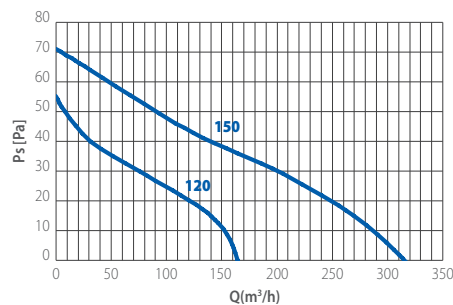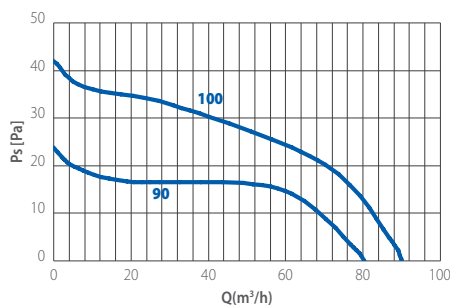

17 mm




Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014 (Classification: Residential Ventilation Unit)


- Provided with back draught shutters on models 100, 120, 150
- Neon running light
- Style, technology

ULTRA SLIM

INSTALLATION



WALL

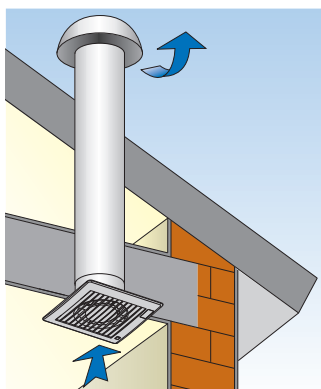


CEILING

VERSIONS

- STANDARD**
On/off through light or remote control switch.
- TIMER**
Integral electronic timer adjustable from 3 to 25 minutes.
- MHT**
Humidity control, adjustable from 40 to 80% of R.H.
- SELV**
SELV 12 V a.c.

DIMENSIONS (mm)

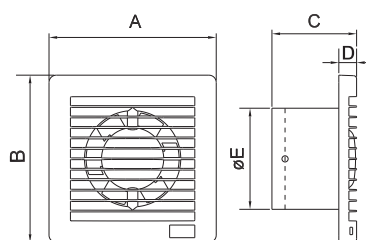

| MODELS | A | B | C | D | Eø | Kg |
|-------------|-----|-----|-----|----|-----|-----|
| E-STYLE 90 | 160 | 160 | 81 | 17 | 92 | 0,4 |
| E-STYLE 100 | 160 | 160 | 95 | 17 | 98 | 0,4 |
| E-STYLE 120 | 180 | 180 | 101 | 18 | 119 | 0,6 |
| E-STYLE 150 | 200 | 200 | 119 | 22 | 149 | 1,0 |

ACCESSORY



chrome



inox satin